


Sonic - accessories for function rail


1. Function rail
2. **Monitor holder** - powder coated steel, colour: M009 - aluminium semi-matt
3. **Pencil case** - powder coated steel
4. **Shelf** - A4 size, powder coated steel
5. **Organizer** - powder coated metal

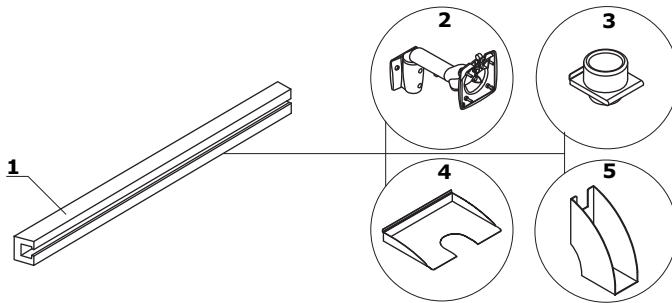

ATTENTION: Only accessories from MDD offer can be mounted

Sonic - screens for single desks (mm)


1. **Fabric** - accoustic class A, pinable
2. **Fixing element** - powder coated metal
3. **Zip fastener**

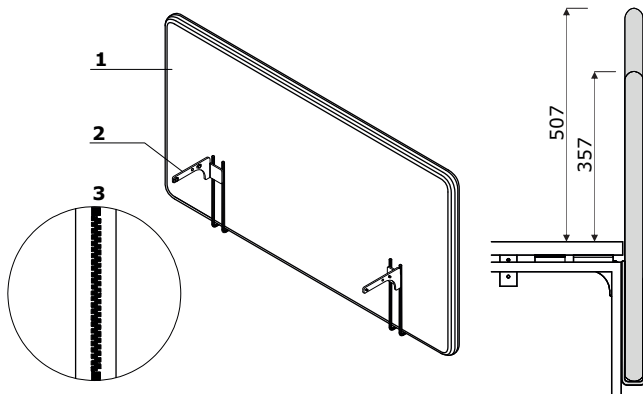


Sonic acoustic screens *




ZUS12
1190 / 40 / 350
9 kg




ZUS14
1390 / 40 / 350
11 kg



ZUS16
1590 / 40 / 350
12 kg




ZUS18
1790 / 40 / 350
13 kg




ZUS20
1990 / 40 / 350
14 kg




ZUS52
1190 / 40 / 500
9 kg




ZUS54
1390 / 40 / 500
11 kg



ZUS56
1590 / 40 / 500
12 kg




ZUS58
1790 / 40 / 500
13 kg




ZUS59
1990 / 40 / 500
14 kg

Sonic - vertical acoustic screens for bench desks *



ZYS78
1600 / 40 / 350
12 kg



ZYS79
1600 / 40 / 500
8 kg



ZOS58
600 / 40 / 350
3.5 kg



ZOS68
700 / 40 / 350
3.5 kg

* dimensions expressed in millimeters: width x depth x height

Sonic – vertical acoustic screens for bench desks *



ZOS78
780 / 40 / 350
3.3 kg



ZOS10
600 / 40 / 500
3 kg



ZOS40
700 / 40 / 500
4 kg




ZOS79
780 / 40 / 500
4 kg


Sonic – acoustic screens for single desk *



ZUS80
600 / 40 / 650
6.5 kg



ZUS90
700 / 40 / 650
8.5 kg




ZUS30
800 / 40 / 650
7.5 kg



ZUS60
600 / 40 / 800
7.7 kg




ZUS70
700 / 40 / 800
8 kg




ZUS50
800 / 40 / 800
8 kg


Sonic – acoustic screens for bench desks *




ZUS11
1200 / 40 / 650
9 kg



ZUS41
1400 / 40 / 650
9.5 kg




ZUS31
1600 / 40 / 650
11 kg




ZUS61
1200 / 40 / 800
12 kg

* dimensions expressed in millimeters: width x depth x height

Sonic – acoustic screens for bench desks *




ZUS71
1400 / 40 / 800
12 kg




ZUS51
1600 / 40 / 800
11 kg


Sonic – acoustic screens for single desks *




ZPS612
1190 / 40 / 650
5 kg




ZPS614
1390 / 40 / 650
6 kg




ZPS616
1590 / 40 / 650
7 kg




ZPS618
1790 / 40 / 650
9.1 kg




ZPS620
1990 / 40 / 650
10.6 kg




ZPS812
1190 / 40 / 800
6 kg




ZPS814
1390 / 40 / 800
7.5 kg



ZPS816
1590 / 40 / 800
8.5 kg




ZPS818
1790 / 40 / 800
9.5 kg




ZPS820
1990 / 40 / 800
10.5 kg

* dimensions expressed in millimeters: width x depth x height


Sonic – acoustic screens for bench desks *




ZD812
1190 / 40 / 800
15.1 kg




ZD814
1390 / 40 / 800
16.1 kg



ZD816
1590 / 40 / 800
15 kg




ZD818
1790 / 40 / 800
18.1 kg




ZD820
1990 / 40 / 800
18.1 kg


Protective panel *




PUX12
1190 / 4 / 350
3.4 kg




PUX14
1390 / 4 / 350
3.9 kg



PUX16
1590 / 34 / 350
4.2 kg




PUX18
1790 / 4 / 350
4.6 kg




PUX20
1990 / 4 / 350
4.9 kg



PUX80
577 / 4 / 350
2.2 kg




PUX90
677 / 4 / 350
2.3 kg



PUX30
777 / 4 / 350
2.4 kg

* dimensions expressed in millimeters: width x depth x height

Fabric Nemo

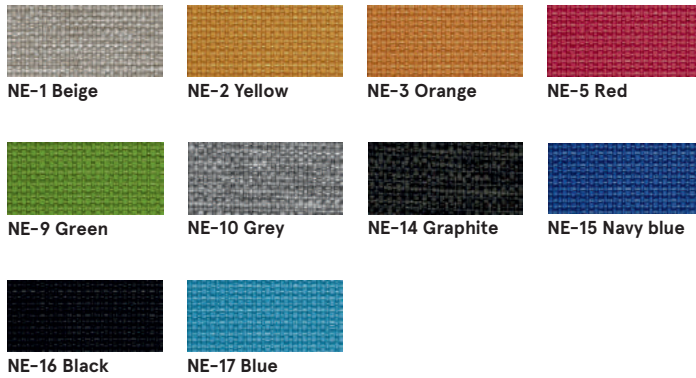

Technical data:

| | |
|-----------------------------------|--|
| Material | polyester 100% |
| Fabric weight | 366g/m2 |
| Abrasion resistance rubs | PN_EN ISO 12947 - 2:2 100,000 |
| Pilling resistance | scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4) |
| Colour fastness to light | scale 1-5, max. 5, PN-EN 1021 - 2, |
| Colour fastness to rubbing | PN-EN 1021 - 1 skcale 1-5, max. 5, EN ISO 105x12 (wet/dry) 4-5 |

Fabric Runner - second price group



Technical data:

| | |
|---------------------------------------|--|
| Material | 80% polyester, 20% post-consumer recycled polyester |
| Fabric weight | 510 g/lm (16.45 oz/lin.yd.) |
| Abrasion resistance rubs | BS EN ISO 12947-2 70,000 Martindale cycles |
| Pilling resistance | scale 1-5, max 5, EN ISO 12945-2 (4-5) |
| Colour fastness to light | scale 1-8, max 8, EN ISO 105-B02 (5-7) |
| Colour fastness to rubbing | scale 1-5, max 5, EN ISO 105x12 (wet/dry) 4-5 |
| Acoustic test sound absorption | ISO 354 |
| Flammability | BS EN 1021-2 Match, CA TB 117-2013, BS EN 1021-1 (cigarette) Class Uno UNI 9175 Class 2, EMME |

Fabric Medley - second group



Technical data:

| | |
|---------------------------------------|--|
| Material | polyester 100% |
| Fabric weight | 510 g/lm (16.45 oz/lin.yd.) |
| Abrasion resistance rubs | BS EN ISO 12947-2, 75,000 cykli Martindale |
| Pilling resistance | scale 1-5, max. 5, EN ISO 12945-2 (4) |
| Colour fastness to light | scale 1-8, max. 8, EN ISO 105-B02 (5-7) |
| Colour fastness to rubbing | scale 1-5, max. 5, EN ISO 105x12 (wet/dry) (4-5/4-5) |
| Acoustic test sound absorption | ISO 354 |
| Flammability | BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I |

Fabric Atlantic * - second price group



Technical data:

| | |
|-----------------------------------|---|
| Material | polyester 100% |
| Fabric weight | 530 g/lm (17.09 oz/lin.yd.) |
| Abrasion resistance rubs | BS EN ISO 12947-2, 110,000 Martindale cycles |
| Pilling resistance | scale 1-5, max. 5, EN ISO 12945-2 (4-5) |
| Colour fastness to light | scale 1-8, max. 8, EN ISO 105-B02 (5-7) |
| Colour fastness to rubbing | scale 1-5, max. 5, EN ISO 105x12 (wet/dry) |
| Flammability | CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette) |

Fabric River - second group



Technical data:

| | |
|-----------------------------------|--|
| Material | polyester 100% |
| Fabric weight | 300g/m2 (+/- 5%) |
| Abrasion resistance rubs | 100,000 Martindale cycles (EN ISO 12947-1,2) |
| Pilling resistance | EN ISO 12945-2 (5) |
| Colour fastness to light | 4 (EN ISO 105-B02) |
| Colour fastness to rubbing | dry: 4-5, wet: 3 (EN ISO 105-x12) |
| Flammability | BS 5852: Part 1, Ignition Source 0 (cigarette) BS 5852: Part 1, Ignition Source 1 (match) En1021 - 2 |

Fabric Vita - second price group



Technical data:

| | |
|-------------------------------------|--|
| Material | Surface: 98,5% PVC, 1,5% PU Substrate: 50% poliester, 50% Cotton |
| Fabric weight | 850g/m2 ± 10% (1190G/lin. m ± 10%) |
| Abrasion resistance rubs | BS EN ISO 5470-2, 100,000 Martindale cycles |
| Colour fastness to light | 6 (ISO 105 - B02) |
| Colour fastness to rubbing | wet: 4, dry: 4 (ISO 105 - X12) |
| Flammability | BS EN 1021 - (cigarette) BS EN 1021 - 2 (match) BS 5852 - (Ignition Source 5) BS 7176 - (Medium Hazard) |
| Flexes | BS EN ISO 7854 - Method B, 400.000 Flexing cycles |
| Anti-microblal / Anti-fungal | AATCC 147 |

* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks


Fabric Xtreme – third price group



Technical data:

| | |
|-----------------------------------|--|
| Material | 100% Trevira Clame (CS) 100% Recycling (YS) Flame Retardant polyester. Non metallic dyestuffs. |
| Fabric weight | 310 g/m ² ±5% (435g/lin.m ±5%) |
| Abrasion resistance rubs | 60,000 Martindale cycles (CS) 100,000 Martindale cycles (YS) |
| Colour fastness to light | 6 (ISO 105 - B02) |
| Colour fastness to rubbing | wet: 4, dry: 4 (ISO 105 - X12) |
| Flammability | EN 1021 - 1 (cigarette), EN 1021 - 2 (match) BS 7176 Low Hazard, NF P92-507 M1, DIN 4102 B1, UNI 9175 Class 1 IM, UNI 8456, UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800-1 NF D 60-013 |

Fabric Synergy – third price group

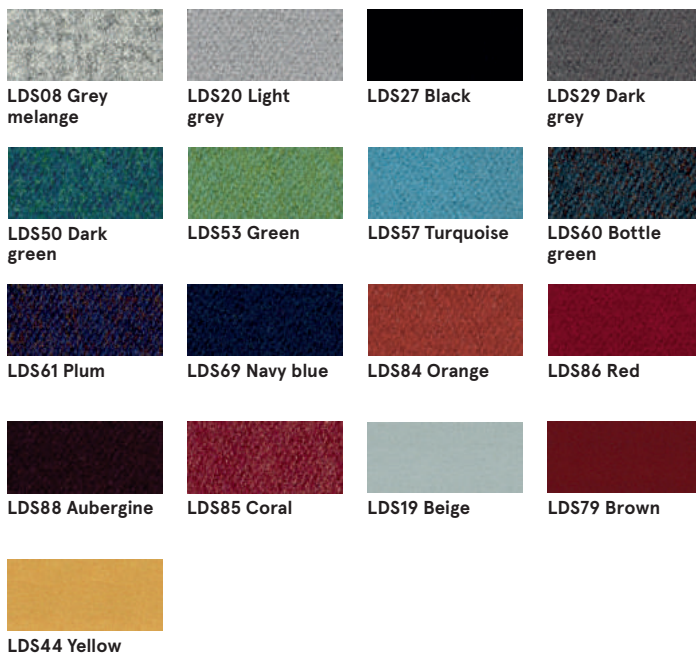

Technical data:

| | |
|-----------------------------------|---|
| Material | 95% Virgin Wool, 5% Poliamid |
| Fabric weight | 400g/m ² ±5% (560 g/lin.m ±5%) |
| Abrasion resistance rubs | Independently certified ≥100,000 Martindale cycles |
| Colour fastness to light | 5 (ISO 105 - B02) |
| Colour fastness to rubbing | ISO 105 - X12 - wet: 4, dry: 4 |
| Flammability | EN 1021 - 1 (cigarette), EN 1021 - 2 (match), BS 7176 Low Hazard, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1 |

Fabric Silvertex – third price group

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

| | |
|------------------------------|--|
| Technical data: | |
| Material | Topcoat: 100% Vinyl Backing: 100% Polyester Hi-Loft™ |
| Fabric weight | 685 gr/m2 |
| Abrasion resistance | >300,000 cycles Martindale |
| UV-resistance | >= 7 (1000 hours, blue wool scale) |
| Cold Crack resistance | -23°C |
| Flame retardancy | NF P 92-503 / M2 EN 1021, Part 1&2 DIN 4102 B2 ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8 (MED) Marine Equipment Directive in its current valid version UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME) UNE 23.727-90 IR /M2 EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability ECE R 118 (replaces Directive 95/28/EC) FMVSS 302 FAR 25/853 |
| Antimicrobial | Antifungal Protection, Antibacterial Protection, Antimycotic Protection |

Fabric Atlas – fourth price group



| | |
|-----------------------------------|--|
| Technical data: | |
| Material | 90% new wool, 10% nylon |
| Fabric weight | 286g/m2, 400g/lm |
| Abrasion resistance rubs | 100,000 cykli Martindale, EN ISO 12947 |
| Colour fastness to light | ISO 105 B02: 6-7 |
| Colour fastness to rubbing | ISO 105-X12:2001, (wet/dry) 4-5/4-5 |
| Flammability | BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 IIM, US Cal. Bull. 117-2013 |

Fabric Field2 – fourth price group



| | |
|---------------------------------|---|
| Technical data: | |
| Material | 100% Trevira CS |
| Fabric weight | 321g/m2, 450g/lm |
| Abrasion resistance rubs | 100,000 cykli Martindale, EN ISO 12947 |
| Colour fastness to light | ISO 105 B02: 5-7 |
| Flammability | BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853, UNI 9177 classe 1, US Cal. Bull. 117-2013 |

Bracket



M009 Aluminum
semi-matt RAL9006



M015 White
semi-matt RAL9010



M154 Anthracite
semi-matt RAL7043



M115 Black
semi-matt RAL9005

Accessories



M009 Aluminum
semi-matt RAL9006
